

Sound level meter
DB 100



*Supplied with wind screen

Technical features

• **Microphone**

Microphone.....prepolarised electret condenser.
Nominal sensitivity.....20 mV/Pa .

• **Sound level meter**

Standards.....IEC 61672-1 Class 2 /
IEC 60651 Class 2 / IEC 60804 Class 2
Measured parameters..... L_A and L_{Aeq}
Other displayed parameters..... L_{AFmax} , L_{AFmin} , L_{ASmax} , L_{ASmin}
Frequency weighting.....A
Measuring range.....30-130 dB
Time weighting.....slow, fast
Data integration time for L_{Aeq}from 1s to 15 min
Overload indicator.....detected at the peak sound-pressure level
Backlighted display.....graphic 128x64 pixels.
Adjustable contrast.
Resolution.....0,1 dB
Reference direction.....microphone axis
Reference range.....30 - 130 dB
Reference level.....94 dB
Reference frequency.....1000 Hz


• **Environmental effects**

Storage relative humidity..... 95 % RH max.
Storage temperature.....from 0 °C to + 50 °C.
Operating temperature.....from -10 °C to + 50 °C.
Humidity dependence.....in accordance with standard between 30 and 90%RH, reference being at 65%RH and 40°C.
Static pressure dependence.....According to class 2 requirements
Standards.....IEC 61672-1 / IEC 60651 / IEC 60804
Electromagnetical compatibility.....As per 89/336/CEE guideline

• **Power supply**

Batteries.....3 AAA or rechargeable batteries
(Rq: rechargeable batteries must not be recharged inside the instrument)
Battery life (at 20°C).....30 hours min (with alkaline batteries)

• **Output**

 **DO NOT PLUG USB cable.** The output is not USB compatible, the plug is maintenance- and optional accessory-specific.

Description

DB 100 sound level meter is reliable, easy to use and in accordance with metrology requirements. DB100 can measure :

- Sound-pressure level
- Time averaged or equivalent continuous sound pressure level

- **Sound-pressure level L_A**
as per two weighting times FAST or SLOW

To be used for stable or slightly fluctuating sound sources. Sound-pressure level (L_A) unit is **dBA** and L_{Amax} and L_{Amin} values are saved.

- **Time averaged sound level L_{Aeq}**


To be used for **fluctuating** sound sources. Time averaged sound level (L_{Aeq}) unit is **dBA** with a programmable integration time in minutes and seconds.

Quick start




- ① ② ③ **Function keys** (See table)
- ④ **Erase and back to previous screen**
- ⑤ **Screen key** (See table)
- ⑥ **On/Off key**

Dimensions

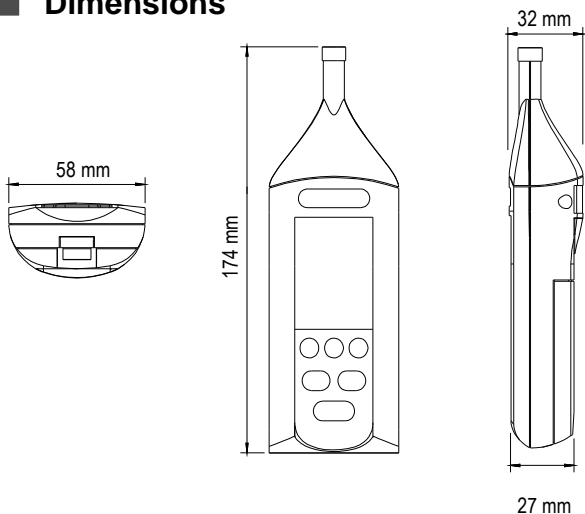

Screens

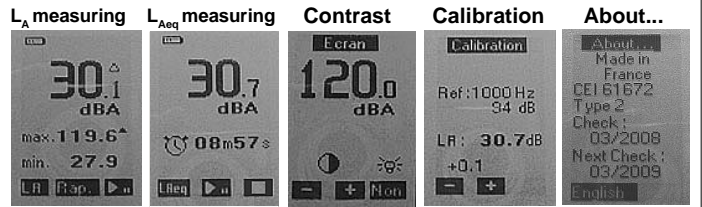

« ^ » symbol indicates the detection of input overload, while « ^ » appears measures must not be taken in account.

FUNCTIONS (Once instrument is switched on)

- L_A measurement**
- 1x ② → Slow time weighting
 - 2x ② → Fast time weighting

- L_{Amax} and L_{Amin} reset** From L_A measuring screen → 1x ④

- L_{Aeq} measurement**
- 1x ① Go to L_{Aeq} measuring screen → 1x ② → Start
 - From L_A measuring screen → 1x ③ → Stop
 - 2x ③ → Reset

- L_A : Hold function** (During measurement)
- 1x ③ → Hold
 - 2x ③ → Re-start

- L_{Aeq} : Hold function** (During measurement)
- 1x ② → Start
 - 2x ② → Stop
 - 3x ② → Re-start

- Contrast settings**
- 1x ⑤ → 1x ① → Decrease
 - 1x ⑤ → 1x ② → Increase

- Backlight**
- 1x ⑤ → 1x ③ → Active
 - 2x ⑤ → 2x ③ → Deactive

- Calibration**
- 2x ⑤ → 1x ① → Calibration value decrease of 0.1dB
 - 1x ⑤ → 1x ② → Calibration value increase of 0.1dB

- Language**
- 3x ⑤ → 1x ① → English
 - 2x ⑤ → 2x ① → French

Accessories (optional)

• CTL 100 Acoustic controller

The acoustic controller allows DB100 functional check with a reference of 90 dB at 1000 Hz.

• CAL200 Acoustic calibrator

The acoustic calibrator allows the checking and calibration of the DB 100 sound level meter with a reference of 94 dB at 1000 Hz

• Wind screen

To protect the microphone against wind and dust.

www.kimo.fr

EXPORT DEPARTMENT

Boulevard de Beaubourg - Emerainville - BP 48
77312 MARNE LA VALLEE CEDEX 2

Tel : + 33.1.60.06.69.25 - Fax : + 33.1.60.06.69.29

RoMiotto Ind. e Com. de
Instrumentos de Medição Ltda

Rua São Leonardo, 187 | Freguesia do Ó | São Paulo | SP
02803-000 | Fone: (11) 3976-4003 | Fone: (11) 3999-7737
www.romiotto.com.br | info@romiotto.com.br

