


















Lufft UMB Sensor Overview

	Wind	Temperature Rel. humidity Air pressure	Temperature Rel. humidity Air pressure Precipitation	Temperature Rel. humidity Air pressure Radiance (solar radiation)
Titan				
	Ventus			WS303
Platinum				
				WS301
Gold				
	V200A	WS300	WS400	WS304
Professional				
	WS200		WS401	WS302



Temperature Rel. humidity Air pressure Wind speed Wind direction	Temperature Rel. humidity Air pressure Wind speed Wind direction Radiance (solar radiation)	Temperature Rel. humidity Air pressure Wind speed Wind direction Precipitation	2 Channel EXPANDER	Protocols
			ANACON	UMB MODBUS ASCII SDI12
	WS503			
			ANACON	UMB MODBUS ASCII SDI12
	WS501			
			ANACON	UMB MODBUS ASCII SDI12
WS500	WS504	WS600		
			ANACON	UMB MODBUS ASCII SDI12
	WS502	WS601		



Lufft WS304-UMB – Tilttable Pyranometer, Temperature, Air Pressure, Relative Humidity, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Solar Radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Measurement output can be accessed by the following protocols:
UMB-Binary, UMB-ASCII, SDI-12, MODBUS .

One external temperature or rain sensor is connectable.

Lufft WS304-UMB Smart Weather Sensor			Order No.
WS304-UMB			8374.U12
Technical Data	Dimensions	Ø approx. 150mm, height 377 mm	
	Weight	approx. 1.5 kg	
Temperature	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
Relative humidity	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
Radiation	Response time (95%)	< 1s	
	Spectral range	300 to 1100 nm	
	Measuring range	1400 W/m ²	
Air pressure	Principle	MEMS capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	±0.5 hPa (0 ... 40°C)	
General Information	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Operating power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Operating temperature range	-50 ... 60 °C	
Accessories	Surge protection		8379.USP
	Power supply 24V/4A		8366.USV1
	UMB Interface converter ISOCON-UMB		8160.UISO
	Digital-analog-converter DACON8-UMB		8160.UDAC
	Temperature Sensor WT1		8160.WT1
	Road Surface Temperature Sensor WST1		8160.WST1
	Rain Sensor WTB100		8353.10
	Connection cable, 20m		8370.UKAB20



All in One

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS

- Analogue outputs in combination with 8160.UDAC

Third-Party-Rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

Standard-Certificate for all UMB-Sensors



LUFFT Mess- und
Regeltechnik GmbH

Seite/ Page: 1/2

Herstellerprüfzertifikat M nach DIN 55350-18-4.2.2
Manufacturer test certificate M according to DIN 55350-18-4.2.2

Gegenstand <i>Object</i>	IRS31-UMB		
Sensornummer <i>Sensor number</i>		Seriennummer <i>Serial number</i>	
Hersteller <i>Manufacturer</i>	G. Lufft Mess- und Regeltechnik GmbH Gutenbergstraße 20 70736 Fellbach, Germany		

Temperaturmessung / *Temperature measurement*

Prüfpunkt <i>Test point</i>	Prüfbedingung <i>Test conditions</i>	Bestanden <i>Passed</i>	
		Ja <i>Yes</i>	Nein <i>No</i>
Fahrbahnoberflächentemperatur <i>Road surface temperature</i>	Temperatur = 0,0 °C ± 0,1 °C <i>Temperature = 0,0 °C ± 0,1 °C</i>	X	
Tiefentemperatur 1 <i>Temperature under ground 1</i>	Temperatur = 0,0 °C ± 0,1 °C <i>Temperature = 0,0 °C ± 0,1 °C</i>	X	
Tiefentemperatur 2 <i>Temperature under ground 2</i>	Temperatur = 0,0 °C ± 0,1 °C <i>Temperature = 0,0 °C ± 0,1 °C</i>	X	

Temperatursensor / *Temperature sensor*

Prüfpunkt <i>Test point</i>	Prüfbedingung <i>Test conditions</i>	Bestanden <i>Passed</i>	
		Ja <i>Yes</i>	Nein <i>No</i>
Fahrbahnoberflächensensor <i>Road surface sensor</i>	Temperatur = 0,0 °C ± 0,1 °C <i>Temperature = 0,0 °C ± 0,1 °C</i>		
Tiefentemperatursensor 1 <i>Temperature sensor under ground 1</i>	Temperatur = 0,0 °C ± 0,1 °C <i>Temperature = 0,0 °C ± 0,1 °C</i>		
Tiefentemperatursensor 2 <i>Temperature sensor under ground 2</i>	Temperatur = 0,0 °C ± 0,1 °C <i>Temperature = 0,0 °C ± 0,1 °C</i>		

Dieses Prüfzertifikat darf nur vollständig und unverändert weiterverbreitet werden. Auszüge oder Änderungen bedürfen der Genehmigung des Ausstellers. Prüfzertifikate ohne Unterschrift und Stempel haben keine Gültigkeit.
This test certificate may not be reproduced other than in full except with the permission of the exhibitor. Test certificates without signature and seal are not valid.

Stempel
Seal

Datum
Date

Qualitätssicherung
Quality control

Bearbeiter
Person in charge

F. V. Hoff Großmann

LUFFT Mess- und
Regeltechnik GmbH



Seite/ Page: 2/2


Herstellerprüfzertifikat M nach DIN 55350-18-4.2.2
Manufacturer test certificate M according to DIN 55350-18-4.2.2

Seriennummer / *Serial number*:

Kalibrierung Gefriertemperatur / *Calibration freezing point*

Wasserfilmhöhe <i>water film height</i>	Gefriertemperatur <i>freezing point</i>	Sollwert <i>reference value</i>	Messwert <i>reading</i>
H ₂ O + NaCl 11,8 %, 1000 µm	-8,9 °C ± 1 °C	11,8 % ± 1,0 %	%
H ₂ O + NaCl 2,0 %, 500 µm	-1,0 °C ± 1 °C	2,0 % ± 1,0 %	%
H ₂ O + NaCl 1,1 %, 250 µm	-0,6 °C ± 1 °C	1,1 % ± 1,0 %	%

Kalibrierung Wasserfilmhöhe / *Calibration water film height*

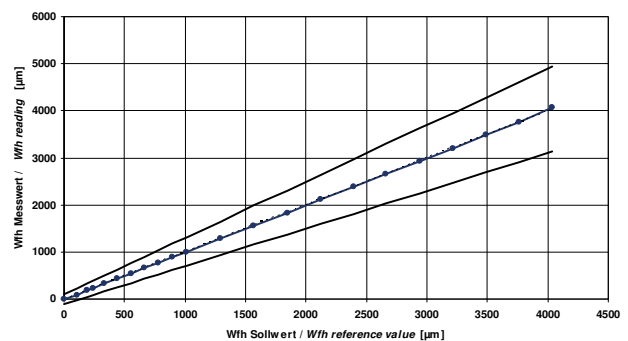

Funktionstest / *Function test*

Prüfpunkt <i>Test point</i>	Prüfbedingung <i>Test conditions</i>	Bestanden <i>Passed</i>	
		Ja <i>Yes</i>	Nein <i>No</i>
Temperaturzyklus von -30 °C...+70 °C <i>Temperature cycle from -30 °C...+70 °C</i>	Alle Messwerte korrekt <i>All measured values correctly</i>	X	